SERIES / PHAEDRA

# **FEDRA**

COMPREHENSIVE OFFICE EQUIPMENT. MOBILITY SYSTEMS.





Polígono La Portalada II / Cordonera, 5 CP-26006 – LOGROÑO (La Rioja) Telephone: 941-230752 Fax: 941-248977

ismobel.com

## **INDEX CONTENTS**

- 1 / PRODUCT DESCRIPTION
- 2 / PHOTOGRAPHS
- 3 / REGULATIONS
- 4 / FINISHES
- 5/ PICTOGRAMS

1/

### **DESCRIPTION**

#### AND TECHNICAL CHARACTERISTICS

Description of the product offered /

- Table tops made of 25mm particle board. thick, bilaminated finish (made with PEFC certification). Finish to choose from all our designs.
- Optionally they can be served in: .1

Laminated finish on chipboard (HPL) .2 Phenolic (COMPACMEL)

.3 Varnished natural wood

veneer on chipboard. • 2mm PVC/ABS straight edges. thick applied

with hot melt glue (100% recyclable) with all edges rounded with a 2mm radius. Optionally, rounded edges can be used. • Optionally, it can incorporate an anti-shock edge through a profile embedded in the edge that

Protects from impacts when joined together (see detail photo).

- The cover may have a cable gland hole with a decorative cover or a TOP ACCESS (metallic or plastic) located in the place indicated by the property and in the chosen finish.
- Structure formed by two legs in the shape of an inverted "Y", made of 100x30x2mm steel tube. thick finished in aluminum, black or white epoxy paint. Each leg incorporates two high-

resistance wheels with brakes and a 60mm diameter. • Once folded the distance from

wheel to wheel is close to 250mm. • The legs are joined together by a central

crossbar to give rigidity to the whole. Made of 40x40x2mm steel tube. thick and finished in aluminum, black or white epoxy paint. • Folding envelopes 90° by simply operating the system incorporated in the upper part of the

The paws.

- Tables prepared to be stacked vertically and for easy handling or transport anywhere. of their positions.
- Legs provided with stacking protectors to avoid damaging table tops when stacking them.

Optionally, you can incorporate quick-connect fittings using "click" made of high-quality polyamide. black color.

Coating of the metal parts in epoxy powder paint with 80 microns after phosphating.

Antioxidant, guaranteeing 200 hours of salt fog. Characteristics: .1

Resistance to chemical agents for domestic use UNE 48027:1980 5 (24H), 4 (72H). .2 Resistance

to mechanical damage: UNE-EN ISO 2409:2007 Classification: 0. .3 Fall of a

mass: UNE-EN ISO 6272-1:2004, at 500 mm without cracking. .4 Resistance to

humidity: UNE-EN ISO 6270-1:2002 without alteration. .5 Accelerated

aging: UNE EN ISO 11507:2007 24H loss of gloss

- Joining the board to the structure using "metal to metal" joints.
- The structure complies with the following

regulations: .1 Regarding dimensions: EN 527-1:2000 Aptd

3,4,5. .2 Regarding safety requirements: EN 527-2:2002 Aptd 3,4 .3

Regarding mechanical tests: EN 527-3:2003 Aptd 6.1 to 6.6.




- It can incorporate a folding front skirt in the same finish as the 19mm table. thick, attached to the support structure using folding clamping brackets. The skirt can also be metallic.
  It can incorporate a metal electrification channel to collect cables. This is attached to the support structure and is placed along the board.
  Made of 1 mm steel sheet. They come in different sizes and single or double for seats in BENCH format.
- In addition, to raise cables from the ground to the electrification channel, a plastic cable gland profile (vertebra), a totem made of aluminum profile or a metal accessory finished to match the structure.
- There are socket boxes prepared to be attached or embedded in the different tables in the series.

2/

## **PHOTOGRAPHS**





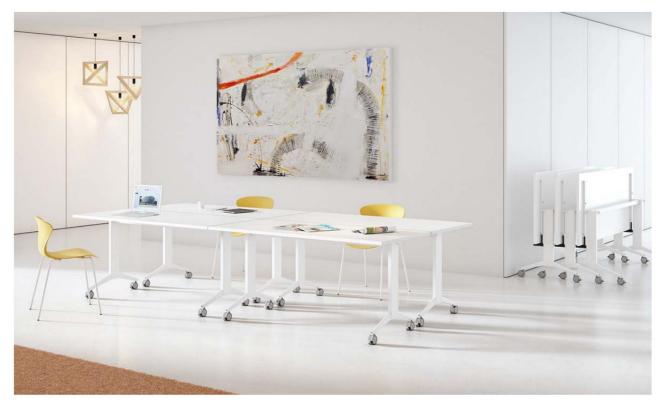











 $Polígono\ La\ Portalada\ II\ /\ C. Cordonera\ N^{o}\ 5\ /\ CP-26006\ -\ LOGRO\~NO\ (La\ Rioja)\ /\ Telephone:\ 941-230752\ /\ Fax:\ 941-248977\ Argument (La\ Rioja)\ /\ Telephone:\ Polígono\ La\ Rioja)\ /\ Telephone:\ Polígono\ Rioja)\ /$ 



3/

# **NORMATIVE**

Regulations that comply (Appendixes are attached)

- ISO 9001 quality certificate
- ISO 14001 Environmental Certificate
- TECNALIA quality mark certificate.
- TECNALIA product certificate.

4/

# **FINISHES**



